

DELTA LED PANEL LIGHT



Quality Core Component

Excellent luminaire design to the core: starting with the LED packages themselves. These luminaires only use high quality SMD packages -- chipsets that have great quality and long life as backed by LM-80 reports.



Desirable CRI

With a CRI of 80, SONARAY's Panel Light brings out the colors you want wherever and however you decide to install it.




Emergency Illumination

With emergency battery for one hour back-up, the Panel Light can handle an emergency power-out scenario. (Optional)




Energy Saving

The combination of high-efficacy LED components with excellent whole system design has SONARAY LED Lighting achieving energy savings of 60% compared with traditional lighting sources.

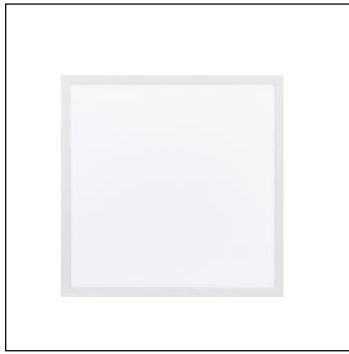

Specifications

Lighting type: side-lit
 Driver: External Power
 Factor: ≥ 0.9
 Input Voltage: 100-277V~50/60Hz
 Material: Aluminum+PC
 Operating Temperature: -25°C~+40°C, -13°F~+104°F
 Lifetime: $\geq 50,000$ hrs



CE IP20

Color Temperature




Model No.	Power (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	Color Temperature (K)	CRI (Ra)	Beam Angle (°)	Weight (kg/lb)
MB-2040A	40W	3200	80	4000	≥ 85	120	3.7/8.16

Other optional:




MB-2040AL
 Weight: 3kg/6.61lb
 Dimension: 603×603×12.5mm

Light Distribution Curve




Illuminance Distribution



Specifications

Lighting type: side-lit
 Driver: External Power
 Factor: ≥ 0.9
 Input Voltage: 100-277V~50/60Hz
 Material: Aluminum+PC
 Operating Temperature: -25°C~+40°C, -13°F~+104°F
 Lifetime: $\geq 50,000$ hrs

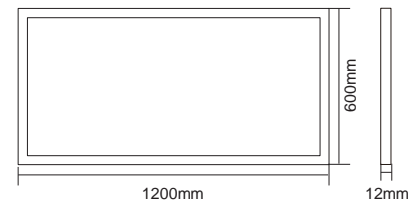


CE IP20

Color Temperature




Model No.	Power (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	Color Temperature (K)	CRI (Ra)	Beam Angle (°)	Weight (kg/lb)
MB-2080C	80W	6400	80	4000	≥ 85	120	7.4/16.31

Light Distribution Curve

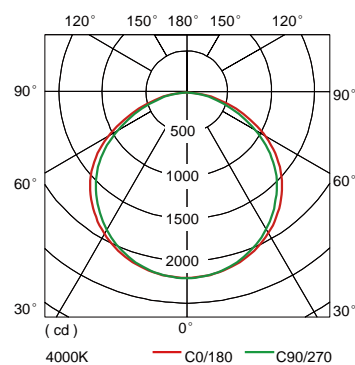

Illuminance Distribution

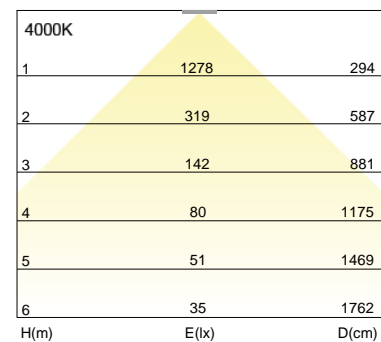

www.sonarayled.com

© 2015 DASCOM LED LIGHTING (JIANGMEN) CO.,LTD. All rights reserved.
 All company and product names are trademarks or registered trademarks of their respective owner. Specifications are subject to change without notice.

Version 1.2. Edited 2015.06

