



DELTA LED STREET LIGHT



High Benefit-Cost Value

An extremely economical and efficient light, yet available at exceptional low price.



Energy Saving

Best replacement choice for conventional 70W~100W HPS lamps. Equally bright, but with up to 57%~70% energy savings.



Excellent Optical Design

The diffuser is adopted for optimal design. It creates excellent light quality, reducing discomfort from glaring.



High Durability

The aluminum body is processed with a unique treatment to form a protective anti-corrosive and UV-resistant layer. High durability also means the luminaire can work well in harsh environments.



Complies with USA Certification


Certified by authorized laboratory for UL (USA and Canada).

DELTA LED STREET LIGHT




Specifications

Housing Material: Aluminum
 Panel Material: Acrylic
 Driver: Built-in
 Input Voltage: AC100-277V ~ 50/60Hz
 Operating Temperature: -25°C~+45°C, -13°F~+113°F
 Lifetime: ≥ 50,000hrs

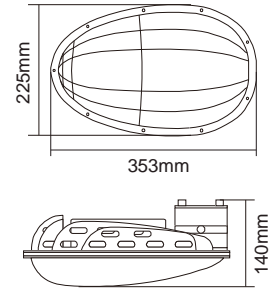


IP65

Color Temperature



Model No.	Power (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	Color Temperature (K)	CRI (Ra)	Beam Angle (°)	Weight (kg/lb)
ST-4030	30	3180	106	5000	≥80	120	2/4.41

Light Distribution Curve

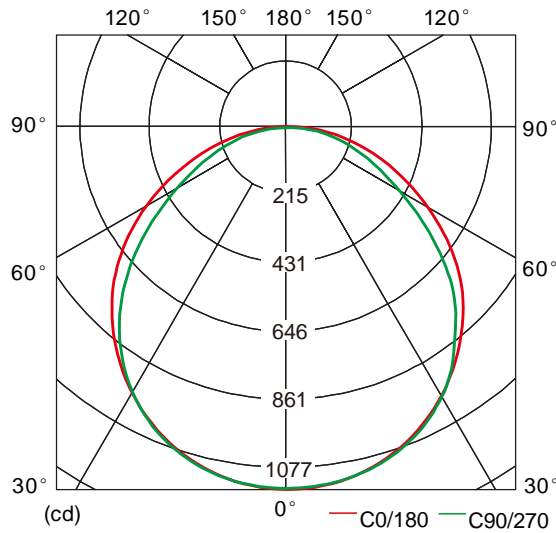

www.sonarayed.com

© 2014 DASCOM LED LIGHTING (JIANGMEN) CO.,LTD. All rights reserved.
 All company and product names are trademarks or registered trademarks of their respective owner. Specifications are subject to change without notice.

Version 1.3. Edited 2015.06