



DASCOM LED LIGHTING SOLUTIONS

External LED T5 Tube


Applications: Be widely used in shopping mall, restaurant, meeting rooms, exhibiton hall, advertising lighting and other places of lighting.



T5-1006

IP20

Power*: 6W
 Luminous Flux: 582lm
 Luminous Efficacy: 97lm/w
 Total Power: 8W
 Circuit Efficacy**: 73lm/w
 Color Temperature: 6300K
 CRI: ≥65
 Beam Angle: 90°×110°
 Material: Aluminum+PC
 Driver: External
 Input Voltage: DC40-46V
 Input Current: 150mA
 Lamp Base: G5
 Cover: Matte Cover
 Weight: 75g/0.165lb
 Operating Temperature: -25°C~+45°C, -13°F~+113°F
 Lifetime: ≥35,000hrs

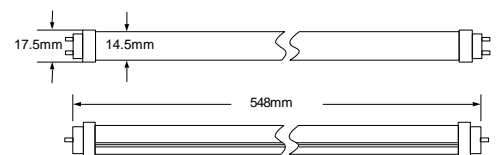


Remark: Power*: The power consumption of tube.
 Total Power**: The total power consumption of the whole system.



T5-1008

IP20

Power*: 8W
Luminous Flux: 736lm
Luminous Efficacy: 92lm/w
Total Power: 10W
Circuit Efficacy**: 74lm/w
Color Temperature: 6300K
CRI: ≥65
Beam Angle: 90°×110°
Material: Aluminum+PC
Driver: External
Input Voltage: DC34-40V
Input Current: 220mA
Lamp Base: G5
Cover: Matte Cover
Weight: 75g/0.165lb
Operating Temperature: -25°C~+45°C, -13°F~+113°F
Lifetime: ≥35,000hrs

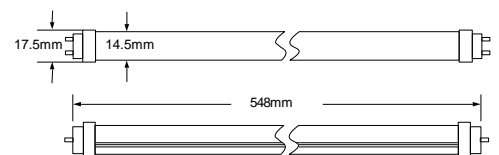


Remark: Power*: The power consumption of tube.
Total Power**: The total power consumption of the whole system.



T5-1010

IP20

Power*: 10W
Luminous Flux: 950lm
Luminous Efficacy: 95lm/w
Total Power: 12W
Circuit Efficacy**: 79lm/w
Color Temperature: 6300K
CRI: ≥65
Beam Angle: 90°×110°
Material: Aluminum+PC
Driver: External
Input Voltage: DC43-49V
Input Current: 220mA
Lamp Base: G5
Cover: Matte Cover
Weight: 75g/0.165lb
Operating Temperature: -25°C~+45°C, -13°F~+113°F
Lifetime: ≥35,000hrs

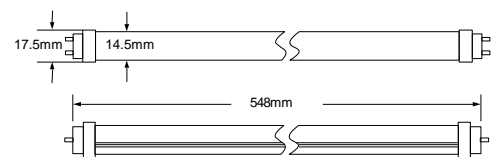


Remark: Power*: The power consumption of tube.
Total Power**: The total power consumption of the whole system.



T5-1012

IP20

Power*: 12W
Luminous Flux: 1212lm
Luminous Efficacy: 101lm/w
Total Power: 15W
Circuit Efficacy**: 81lm/w
Color Temperature: 6300K
CRI: ≥65
Beam Angle: 90°×110°
Material: Aluminum+PC
Driver: External
Input Voltage: DC40-46V
Input Current: 300mA
Lamp Base: G5
Cover: Matte Cover
Weight: 150g/ 0.33lb
Operating Temperature: -25°C~+45°C, -13°F~+113°F
Lifetime: ≥35,000hrs

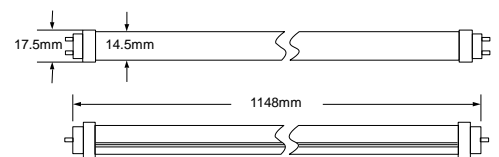


Remark: Power*: The power consumption of tube.
Total Power**: The total power consumption of the whole system.



T5-1016

IP20

Power*: 16W
Luminous Flux: 1632lm
Luminous Efficacy: 102lm/w
Total Power: 19W
Circuit Efficacy**: 86lm/w
Color Temperature: 6300K
CRI: ≥65
Beam Angle: 90°×110°
Material: Aluminum+PC
Driver: External
Input Voltage: DC34-40V
Input Current: 440mA
Lamp Base: G5
Cover: Matte Cover
Weight: 150g/ 0.33lb
Operating Temperature: -25°C~+45°C, -13°F~+113°F
Lifetime: ≥35,000hrs

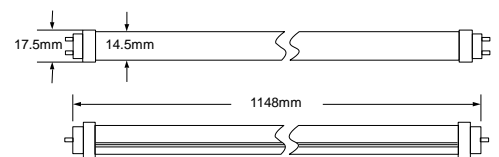


Remark: Power*: The power consumption of tube.
Total Power**: The total power consumption of the whole system.



T5-1021

IP20

Power*: 21W
Luminous Flux: 2058lm
Luminous Efficacy: 98lm/w
Total Power: 24W
Circuit Efficacy**: 86lm/w
Color Temperature: 6300K
CRI: ≥65
Beam Angle: 90°×110°
Material: Aluminum+PC
Driver: External
Input Voltage: DC43-49V
Input Current: 440mA
Lamp Base: G13
Cover: Matte Cover
Weight: 150g/ 0.33lb
Operating Temperature: -25°C~+45°C, -13°F~+113°F
Lifetime: ≥35,000hrs

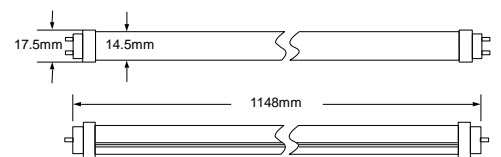

Remark: Power*: The power consumption of tube.
Total Power**: The total power consumption of the whole system.