




DASCOM LED LIGHTING SOLUTIONS

LED High Bay 2000 Series (Transparent Lampshade)

High Ceiling Applications, Factories, Warehouse, Railway station, Gym, Supermarket

SONARAY




LED High Bay

HB-C-2045


CE CCC RoSH IP20

Power: 45W
 Luminous Flux: 3375lm
 Luminous Efficacy: 74lm/w
 Color Temperature: 5000K
 CRI: ≥ 80
 Beam Angle: 53°
 Material: Aluminum+PC
 Power Supply: Built-in
 Input Voltage: AC100-240V,50/60Hz
 Power Factor: ≥ 0.9
 Weight: 3.9kg
 Operation Temperature: $-20^\circ\text{C} \sim +40^\circ\text{C}$
 Average Lifetime: $\geq 35000\text{hrs}$

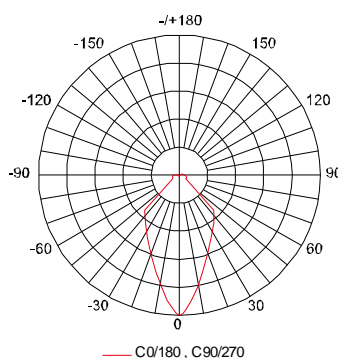

H(m)	E(lx)	D(cm)
1	2149	99
2	537	199
3	239	298
4	134	398
5	86	497


LED High Bay Light

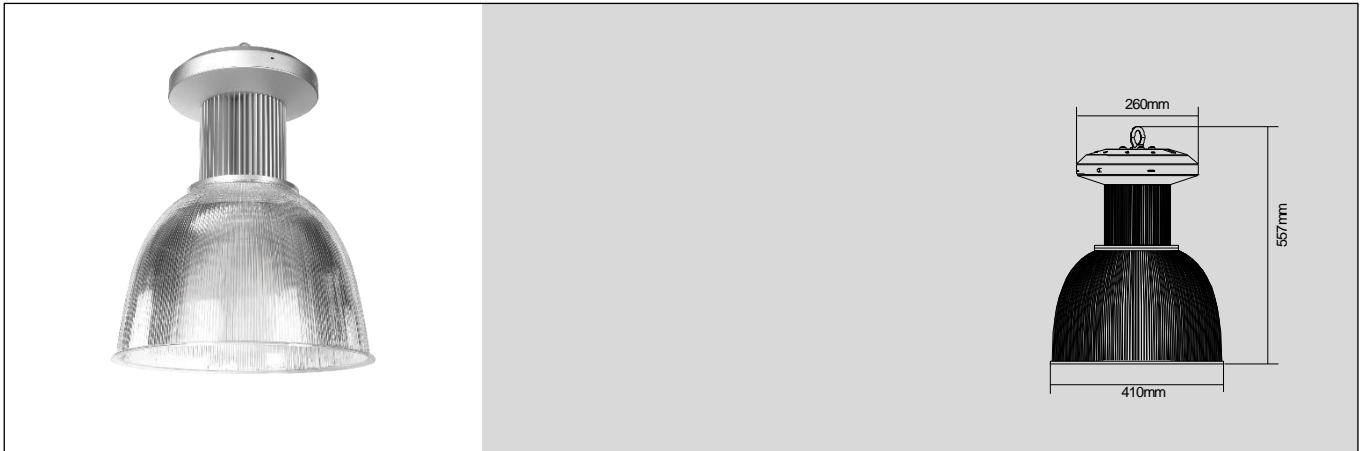


HB-C-2085


CE CCC RoSH IP20

- Power: 85W
- Luminous Flux: 7526lm
- Luminous Efficacy: 88lm/w
- Color Temperature: 5000K
- CRI: ≥80
- Beam Angle: 72°
- Material: Aluminum+PC
- Power Supply: Built-in
- Input Voltage: AC100-240V,50/60Hz
- Power Factor: ≥0.9
- Weight: 5.8kg
- Operation Temperature: -20°C ~ +40°C
- Design Lifespan: ≥60000hrs

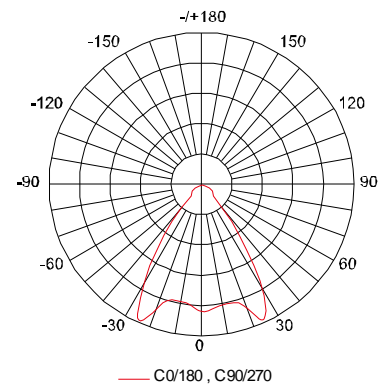

Illuminance Distribution

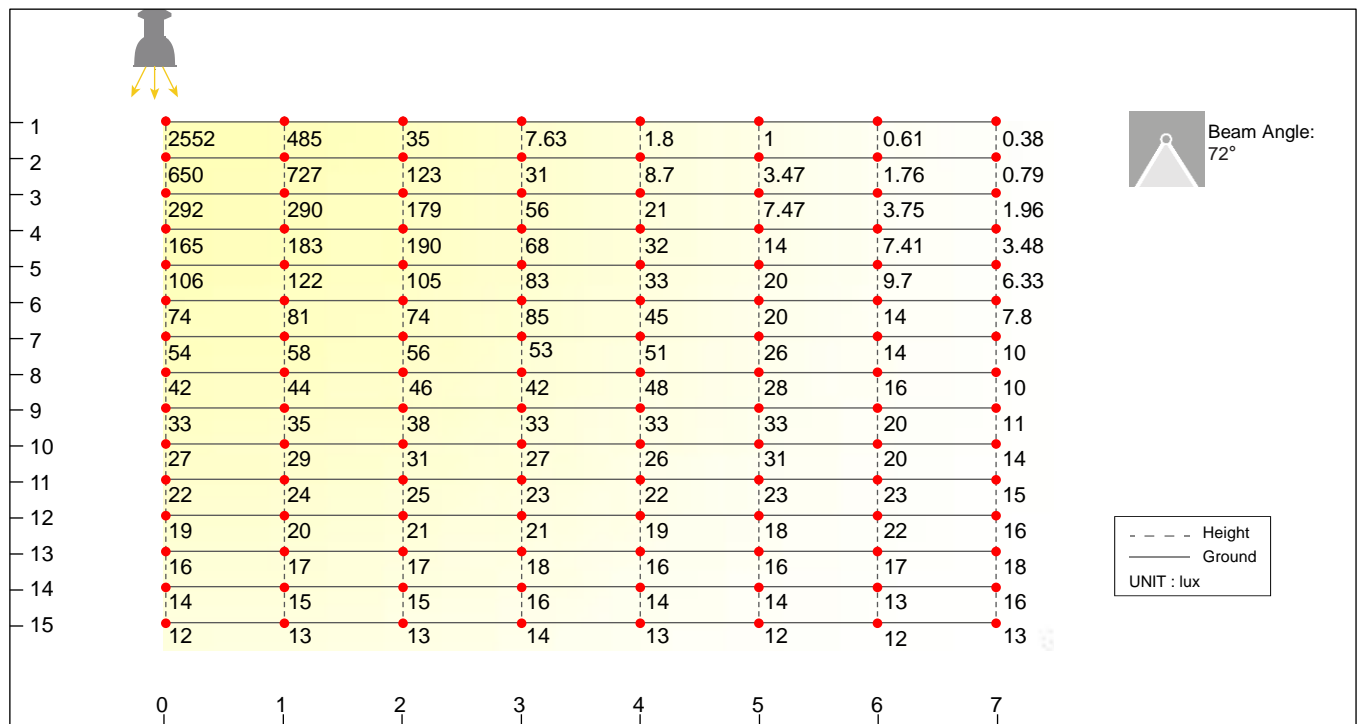




LED High Bay Light


HB-CD-2085

CE RoSH IP20

Power: 85W
 Luminous Flux: 7523lm
 Luminous Efficacy: 88lm/w
 Color Temperature: 5000K
 CRI: ≥80
 Beam Angle: 72°
 Material: Aluminum+PC
 Power Supply: Built-in
 Input Voltage: AC100-240V,50/60Hz
 Power Factor: ≥0.9
 Weight: 6.5kg
 Operation Temperature: -20°C ~ +40°C
 Design Lifespan: ≥35000hrs

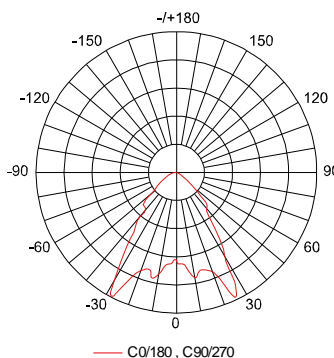

H(m)	E(lx)	D(cm)
3	362	269
6	91	537
9	40	806
12	23	1075
15	15	1343




LED High Bay Light

HB-C-2100

CE RoSH IP20

- Power: 100W
- Luminous Flux: 7917lm
- Luminous Efficacy: 79lm/w
- Color Temperature: 5000K
- CRI: ≥ 80
- Beam Angle: 72°
- Material: Aluminum+PC
- Power Supply: Built-in
- Input Voltage: AC100-240V,50/60Hz
- Power Factor: ≥ 0.9
- Weight: 5.8kg
- Operation Temperature: -20°C ~ +40°C
- Design Lifespan: ≥ 35000 hrs

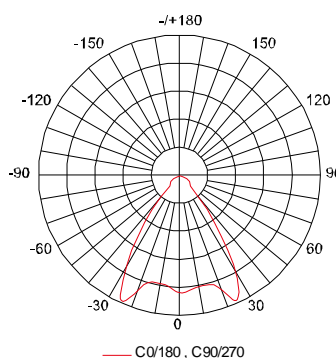

H(m)	E(lx)	D(cm)
3	488	350
6	122	701
9	54	1051
12	31	1402
15	20	1753